KARUP (EKKA)

ARP: 56°17.86N 009°07.49E | AD ELEV: 170 FT

KARUP APP: 120.425 292.750
KARUP TWR: 119.575 241.650

KARUP ATIS: 120.575

RWY SLOPE:
All runways: Less than 1%

OBSTACLES:
All obstacles are marked by day and night

SECONDARY POWER SUPPLY:
Yes, RWY 27L switch-over time during CAT II: 1 SEC, otherwise 15 sec.

ABN:
NIL

ARRESTER CABLES:
Arrester cables for fighters may be suspended across runways. Always disengaged in the approach end. Approach and arrestment on request only. Cables RWY 09L/27R on 30 min. request.

GRASS RWY:
Grass RWY 09-27 2789 x 147 FT is established on either the northern or southern half of the grass strip, depending on surface conditions. Marked with day markings.

DATUM:
Dimensions and distances in FT.

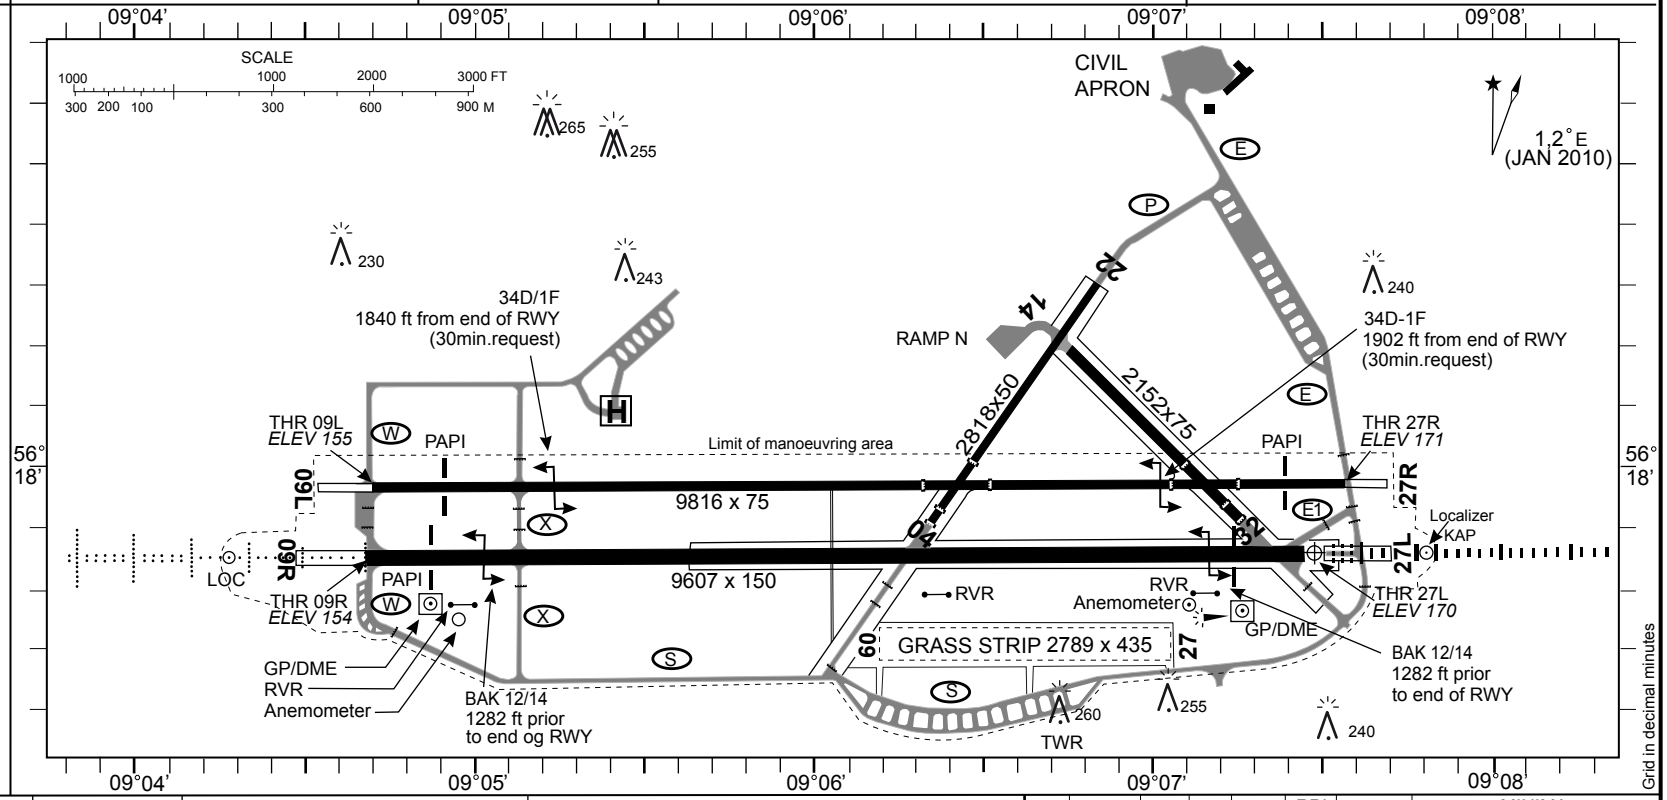

RWY	TRUE BRG	THR PSN	THR elevation / TDZ elevation	Strength and surface of RWY and SWY	DECLARED DISTANCES: PSN TWY	TORA (ft)	TODA (ft)	ASDA (ft)	LDA (ft)	APCH and RWY LGT: APCH	THR	TDZ	PAPI	Edge	End	SWY
09R	089.4°	561749.74N 0090438.39E	THR 154.00 / TDZ 160.00	LCN 65 asphalt/ concrete	W X 04/22	8103 4114	9607 8103 4114	10352 8848 4859	9607	3000 ft NATO STD White	Green	NIL	2.75°	9863 ft LIH White	Red	Red
27L	269.4°	561750.85N 0090728.66E	THR 170.00 / TDZ 170.00		THR E1 04/22	9607 9166 5649	9607 9166 5649	10362 9921 6404	9607	3000 ft CAT II	Green	3000 ft White	2.75°	9863 ft LIH White	Red	Red
09L	089.4°	561756.70N 0090439.44E	THR 154.00 / TDZ 160.00	LCN 45 asphalt	W X 04/22	9816 8375 3920	9816 8375 3920	10389 8948 4493	9816	NIL	Green LIL	NIL	2.75°	9747 ft LIL Yellow	Red LIL	NIL
27R	269.4°	561757.84N 0090733.43E	THR 170.00 / TDZ 170.00		E 04/22	9816 6036	9816 6036	10282 6502	9816	NIL	Green LIL	NIL	2.75°	9747 ft LIL Yellow	Red LIL	NIL

TWY width: TWY E1, TWY S, TWY X: 40 FT. Other TWY's: 50 - 80 FT. TWY lighting: BLUE EDGE. RGL for RWY 09R/27L RWY 04/22, RWY 14/32 AND GRASS RWY 09-27 for day time, VFR use only.

	RWY	GS	TCH	OTCH	RPI	CAT	MINIMA
						ABCDE	**260** - 400 100 (100-0.4/0.8)
						ABCDE	**270** - 400 100 (100-0.4/0.8)
SRA	09R					AB	**480** - 800 320 (400-0.8/1.6)
						CDE	**480** - 1200 320 (400-1.2/1.6)
	27L					AB	**580** - 800 410 (500-0.8/1.6)
						CD	**580** - 1200 410 (500-1.2/2.0)
						E	**580** - 1200 410 (500-1.6/2.4)
CIR	09R/27L						**680** - 1600 510 (600-1.6)
						C	**680** - 2400 510 (600-2.4)
						D	**720** - 3200 550 (600-3.2)
						E	**780** - 3600 610 (700-3.6)

OTHER RUNWAYS

RWY	TRUE BRG	Dimension	Surface	THR coordinates
04	034°	2818 x 50 FT	Asphalt/concrete	561754N 0090620E
22	214°			561817N 0090648E
14	135°	2152 x 75 FT	Asphalt/concrete	561810N 0090647E
32	315°			561755N 0090714E
09	089°	2789 x 147 FT	Grass	
27	269°			

Helipad position: 56°18.07'N 009°05.38'E.

CHANGES: PAR WITHDRAWN

TACDEN FLIGHT INFORMATION 07 APR 2011